


# VELUX flashings

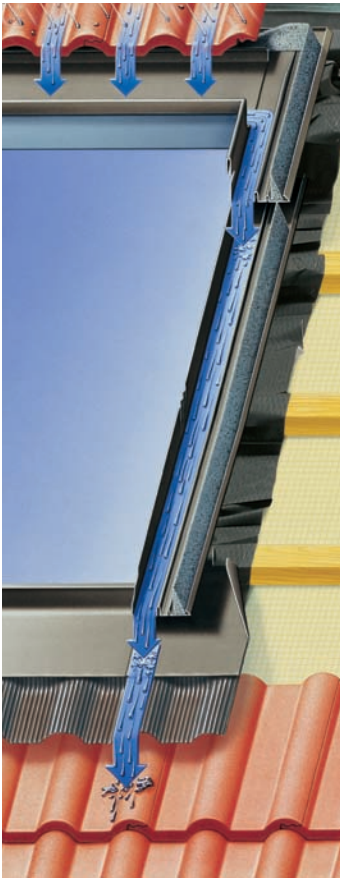

**VELUX flashings ensure weathertight installation of all VELUX Roof Windows, and have several unique features.**

## Installation

VELUX flashings are easy to install. A perfect and discreet installation is ensured in the roofing material. The roofing material conceals the top and side flashing components.



## Materials

VELUX exterior flashings are manufactured in corrosion proof materials. The colours of the materials match the cladding of the roof window. A thoroughly tested construction and composition of materials ensures a complete and weather-resistant flashing.



## Watertight

The flashing components overlap each other to create weather tight joints whilst the foam gasket creates a seal between the flashing and the roofing materials.




## Apron

In profiled roofing material the pleated apron is dressed to form a tight seal.



## Water drainage

The construction of the flashings ensures safe drainage of water from the roof above the window.



## Maintenance


Leaves and other debris should be removed from any flashing once a year to allow rainwater to run freely. Heavy snow should not be allowed to lie on the flashing for long periods of time.



## Guarantee

10 year VELUX guarantee on all Flashing Products.


## Flashing --Z



Flashing --Z is used for flat and profiled roofing materials with a profile height up to 45mm, e.g. interlocking tiles. Not for interlocking slate or profiled sheeting.

**Applications**

## Flashing --W



Flashing --W is used for flat and profiled roofing materials with a profile height up to 120mm, e.g. pantiles, corrugated roofing sheets, etc. Can also be used for thatched roofs and interlocking slate.

**Applications**

**Flashing for flat and profiled roofing materials:**

**EDZ/W**  
Single flashing



**EEW**  
Flashing for roof terrace



**EFW**  
Flashing for roof window combined with vertical window element



**EKW**  
Combi flashing for combined installation of two or more roof windows



**EBW**  
Twin flashing for side-by-side installation of two windows or more



**ETW**  
Additional flashing for downward extension window




**Combinations**

**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

**Materials**

# Flashing --P



Flashing --P is used for installations into plain tiles with a maximum thickness of 15mm and maximum length 340mm.

**Applications**

**Flashing for plain tile:**

**EDP**  
Single flashing



**EBP**  
Twin flashing for side-by-side installation of two windows



**Combinations**

**EKP**  
Combi flashing for side-by-side installation of two windows or more




**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

**Materials**

## EDJ Recessed



The EDJ tile flashing is for recessed installation of one VELUX Roof Window into a flat or profiled roofing material up to 90mm.

The EDJ 2000 Recessed Flashing Includes: BDX Insulation Collar and BFX Underfelt Collar.

### Applications

## EKJ Recessed Combi



The EKJ tile flashing is for the recessed installation of more than one VELUX Roof Window into a flat or profiled roofing material up to 90mm.

### Applications

Flashing for flat and profiled roofing materials:

**EDJ**  
Single flashing



**EFJ**  
Flashing for roof window combined with vertical window element



**EKJ**  
Combi flashing for combined installation of two or more roof windows



**ETJ**  
Additional flashing for downward extension window




### Combinations

**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

### Materials

# Flashing --L



Flashing --L is used for flat roofing materials up to 8mm, i.e. slate, roofing felt, etc. Cannot be used for interlocking slate.

**Applications**

## Flashing for flat roofing materials:

**EDL**  
Single flashing



**EEL**  
Flashing for roof terrace



**EFL**  
Flashing for Roof Window combined with vertical window element



**EKL**  
Combi flashings for combined installation of two or more roof windows



**EBL**  
Twin flashing for side-by-side installation of two windows



**ETL**  
Additional flashing for downward extension window




**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

**Combinations**

**Materials**

## EDN Recessed



Flashing --N is used for recessed installation in flat roofing materials up to 8mm, i.e. slate, roofing felt, etc. Cannot be used for interlocking slate.

The EDN 2000 Recessed Flashing Includes: BDX Insulation Collar and BFX Underfelt Collar.

### Applications

## EKN Recessed Combi



The EKN Combi Flashing is used for recessed installation in flat roofing materials up to 8mm, i.e. slate, roofing felt, etc. Cannot be used for interlocking slate.

### Applications

#### Flashing for flat roofing materials:

**EDN**  
Single  
flashing



**EKN**  
Flashing  
for Roof  
Window  
combined  
with vertical  
window  
element



**EKN**  
Combi  
Flashing for  
combined  
installation of two or  
more roof windows



**ETN**  
Additional  
flashing for  
downward  
extension window




### Combinations

**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium –  
special colours

### Materials

# Window Replacement – EW



Allows the replacement of pre 2001 VELUX Roof Windows with the current window variant, into the existing aperture.


The EW flashing comes with an Insulation Collar as standard.

Flashing EW is used for flat or profiled roofing materials up to 120mm i.e. interlocking slate, pantiles, etc

**Applications**

**Features**

# Window Replacement – EL



Allows the replacement of pre 2001 VELUX Roof Windows with the current window variant, into the existing aperture.

The EL flashing comes with an Insulation Collar as standard.


Flashing EL is used for slate up to 8mm thick.

**Applications**

**Features**



Before



After